


履带型钢（三齿）参数 TRIPLE GROUSER TRACK SHOE PROFILE

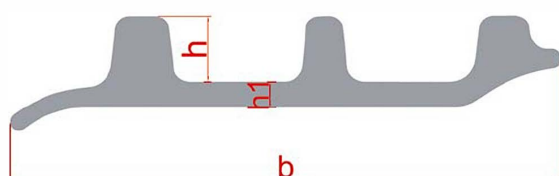

Specification	Technical parameters (mm)			Section area	Weight
产品名称	总宽(b)	齿高(h)	腰厚(h1)	截面积(cm²)	单重(kg/m)
LW135A	154	14	6	13.885	10.900
LW135B	154	14	8	16.938	13.300
LW154A	165	20	6	18.319	14.390
LW154B	165	20	7	19.982	15.680
LW154C	165	20	8	21.635	16.980
LW160	187	18	8	24.666	19.363
LW171A	198.9	25	8	29.062	22.814
LW171B	198.9	25	8.5	30.057	23.595
LW171C	198.9	25	9	31.051	24.390
LW171D	198.9	25	9.5	32.046	25.150
LW171E	198.9	25	10.5	34.035	26.720
LW171F	198.9	25	10	33.040	25.940
LW190	219	26	8	31.080	24.400
LW190A	219	26	8.5	32.611	25.600
LW190B	219	26	10	35.834	28.130
LW190C	219	26	12	40.359	31.682
LW190D	217.5	26	10	36.781	28.870
LW190E	217.5	26	12	41.158	32.310
LW203A	236	28	11	42.675	33.500
LW203B	236	28	13	47.261	37.100
LW216A	250	30	11	46.369	36.400
LW216B	250	30	13	51.338	40.300
LW216C	247	30	14	53.568	42.051
LW216D	247	36	13	54.555	42.830
LW216E	247	36	16	61.911	48.600
LW216F	247	30	16	57.248	44.940
LW216G	247	36	19	69.070	54.220
LW216H	247	36	18	66.900	52.516
LW228	250	37	16	66.332	52.070
DB190A	219	26	8.5	33.170	26.000
DB190B	219	26	10	36.450	28.000
P216A	247	36	11	51.586	40.500
P216B	247	36	13	56.527	44.370
P216C	250	30	11	45.484	35.710