



履带型钢（单齿）参数 SINGLE GROUSER TRACK SHOE PROFILE

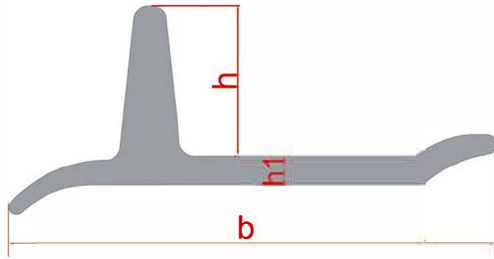

Specification	Technical parameters (mm)			Section area	Weight
产品名称	总宽(b)	齿高(h)	腰厚(h1)	截面积(cm²)	单重(kg/m)
LT154A	182	49	9.5	25.093	19.700
LT154B	182.5	47	10	24.544	19.267
LT171A	202.5	47	11	27.520	21.600
LT171B	199.6	50	12	33.200	26.100
LT190A	225	57	13	37.962	29.800
LT190B	216	50	13	37.962	27.993
LT203A	232.5	65	12	39.605	31.090
LT203B	238	60	14	44.910	35.250
LT203C	243.5	75	15	51.210	40.200
LT203D	242.5	65	13	42.739	33.550
LT216A	250	72	14.3	51.120	40.130
LT216B	247.5	70	14.2	47.640	37.400
LT216C	256.5	82	17	62.905	49.380
LT228A	266	80	17	63.020	49.470
LT228B	261	77.5	19	71.947	56.500

履带型钢（双齿）参数 DOUBLE GROUSER TRACK SHOE PROFILE

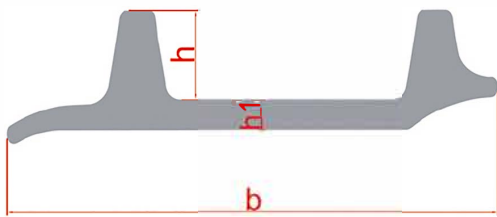

Specification	Technical parameters (mm)			Section area	Weight
产品名称	总宽(b)	齿高(h)	腰厚(h1)	截面积(cm²)	单重(kg/m)
D101	109	16.5	6	10.790	8.470
D175	207	37.5	13	38.700	30.380
D216A	251	49	15.5	64.320	50.170
D260A	302	50	21	93.139	73.110
D260B	302	50	23.5	100.689	79.040
D260C	306	48	20.5	91.490	71.820
D260D	306	48	22	95.949	75.320